





VICTOR EMERGENCY

Emergency Safety light for industrial facilities



- Victor Safety light ensures safe conditions during power failures
- Available in different versions:
 - Central battery system 230 V AC/DC
 - Addressed central battery system CPS 100
 - Addressed central battery system, Teknoware
 - Self-contained with 1h/3h lithium-ion battery (LiFePO4), with automatic self-test function
- Light source LED 10W
- Housing in extruded aluminium, end caps in die cast aluminium
- Silicone gaskets, integrated particle filter
- Diffuser in tempered safety glass (optional diffuser in PMMA or PC), diffuser frame in extruded aluminium
- Diffuser hinged to the housing, hinges in aluminium
- Connection -0- 5x2,5mm² 2xM25 cable glands
- Electrical class I
- Protection rating IP64

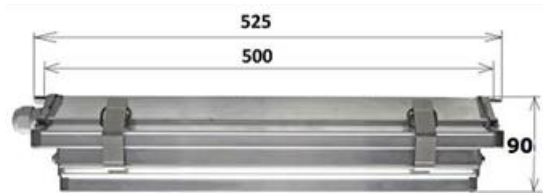

Max. Width 250mm

Product codes

Product code	Total power	Net flux	Connection	Voltage	Version	Addressed	Ta	Kg
LED T 23 D1	10 W	1800 lm	-0- 5x2,5mm ²	230V AC/DC	Central battery	No	-30...+40°C	3,0
LED T 23 D5	12 W	1800 lm	-0- 5x2,5mm ²	230 V AC	CPS100-central battery	Yes	-30...+40°C	3,2
LED T 23 D7	12 W	1800 lm	-0- 5x2,5mm ²	230V AC/DC	Teknoware central battery	Yes	-25...+40°C	3,2
LED T 25 D1	5W	800 lm	-0- 5x2,5mm ²	230V AC	Self-contained with battery 1h/3h	No	5...+40°C	3,5

Options

Option	Extra code at the end of the product code
Polyester coating, standard color RAL 7024	EP
Diffuser in PC	PC
Diffuser in PMMA	PM



ACCESSORIES FOR VICTOR EMERGENCY LUMINAIRES


Wall bracket 9001 05
Pole bracket 9003 05



Wall bracket pair 9002



Wall bracket pair 9005

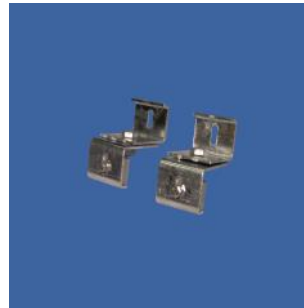

Chain suspension 9008



Wall bracket 9006 05
Pole bracket 9007 05



Telescopic pole 900 T 60 30



Code	Specification	Material	Adjustability	Weight
900 1 05 00	Wall bracket 9001 05	Hot galvanized steel, fixing screws RST	Vertical, stepless	3 kg
900 1 05 00 RST	Wall bracket 9001 05 RST	Stainless steel (RST), fixing screws RST	Vertical, stepless	3 kg
900 2 00 00	Wall bracket pair 9002	Hot galvanized steel, fixing screws RST	Vertical, stepless	2 kg
900 5 00 00	Wall bracket pair 9005	Hot galvanized steel, fixing screws RST	Vertical, stepless	0,5 kg
900 6 05 00	Wall bracket 9006 05	Hot galvanized steel, fixing screws RST	0° - 25° - 45°	2,5 kg
900 8 00 0x (*)	Suspension chains	Chains hot galvanized steel, hooks RST	-	
900 3 05 00	Pole bracket 9003 05 for diam. 45...60mm poles	Hot galvanized steel, fixing screws RST	Vertical, stepless	4 kg
900 3 05 00 RST	Pole bracket 9003 05 RST for diam. 45...60mm poles	Stainless steel (RST), fixing screws RST	Vertical, stepless	4 kg
900 7 05 00	Pole bracket 9007 05	Hot galvanized steel, fixing screws RST/hot galvanized steel	0° - 25° - 45°	3 kg
900 T 60 30	Telescopic pole 2,25...3m, 60mm	Hot galvanized steel	locking every 250mm.	22 kg
900 T 60 30 RST	Telescopic pole RST 2,25...3m, 60mm	Stainless steel	locking every 250mm.	22 kg

(*) x=chain length in full m